


### Variety of Available Test Fixtures and Cables

A variety of test fixtures and cables is available for the HP LCR meters for many applications. Figure 1 is a compatibility chart for the test fixtures and cables and HP's LCR meters. Refer to the individual LCR meter data sheet for details.

- \* 1: Information given with cable length; connector type; recommended frequency for use; max. applicable dc voltage.
- \* 2: Information given with recommended frequency for use; max. applicable dc voltage.
- \* 3: Information given with cable length; recommended frequency for use; max. applicable dc voltage; (shape of UNKNOWN terminals).
- \* 4: A cable with 7 mm connectors required.

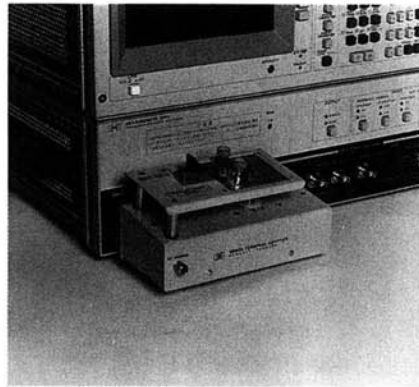

HP 16092A with HP 16085B



HP 16093A with HP 16099A

Note: Refer to the sections of the HP 41941A/B and 41951A for more information.



HP 16451B

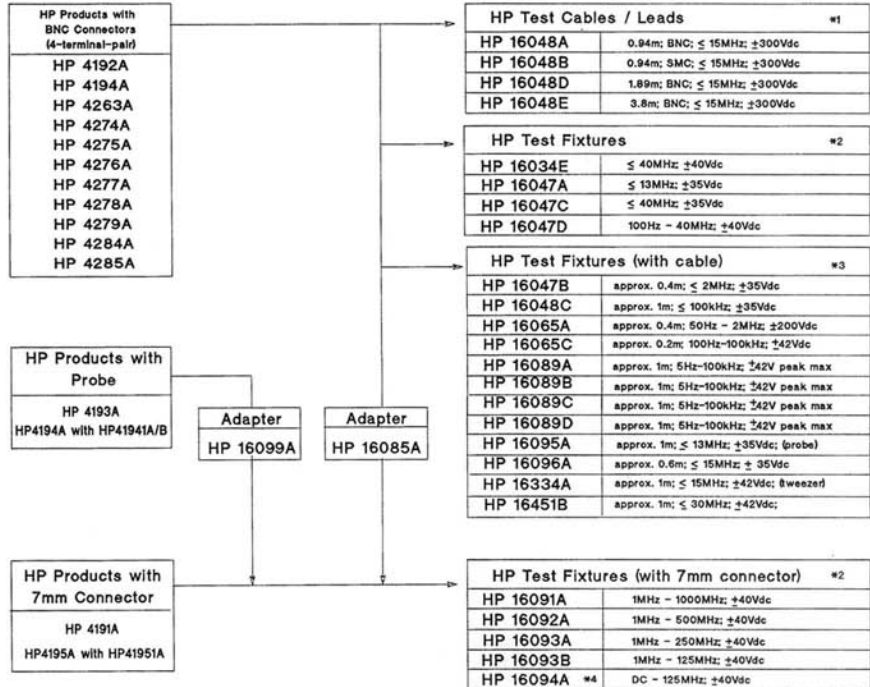


Figure 1. HP instruments versus accessories



HP 16047A




HP 16034E



16047C



HP 16048A

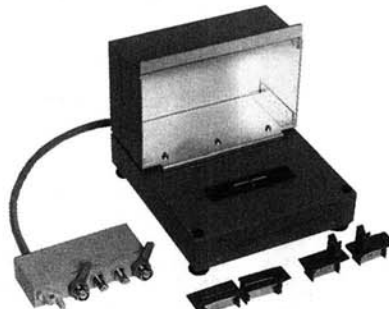

HP 16065A



HP 16334A